


600X600 mm Metal Ceiling (Perforated)


- **CLIP-IN SYSTEM**
- **Galvanized Steel 0,50 mm thick, zinc coating on both sides.**
- **Metal ceiling tiles are fixed on suspended metal suspension system with concealed grid framework.**
- **The suspension components consist of spring tees, main channels, channel brackets, wire coupling clips and perimeter edge trims.**
- **45° Bevel Edge.**
- **Ø 2.5 mm perforation, Δ 5,5 mm, open area %16.**
- **10 cm plain border all around.**
- **Soundtex Acoustic Fleece.**
- **Electrostatically applied polyester paint. High opacity formulation to a maximum thickness of 80 microns.**




Omega Taşıyıcı




Kenar U Profil

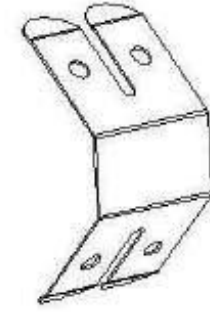


Askı Yayı




Omega Bağlama Yayı

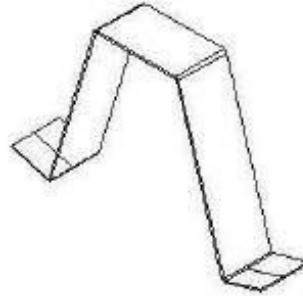







Kenar Baskı Yayı

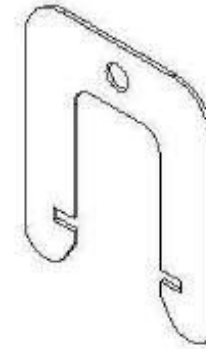

Omega Askı Aparatı

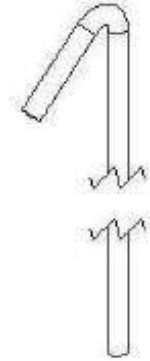

Askı Teli

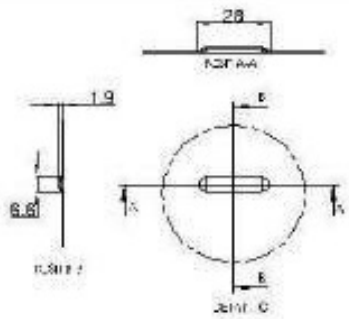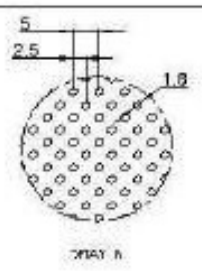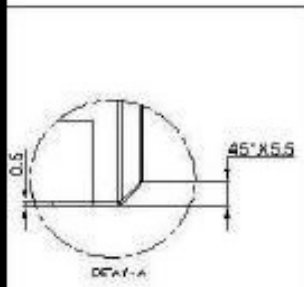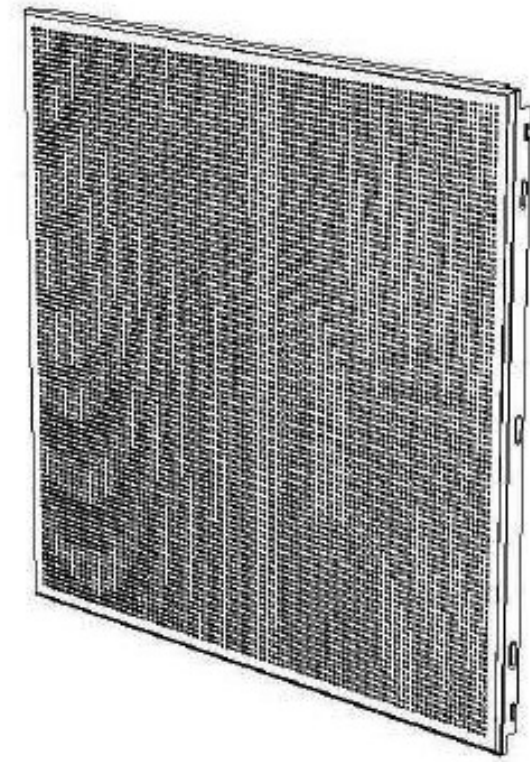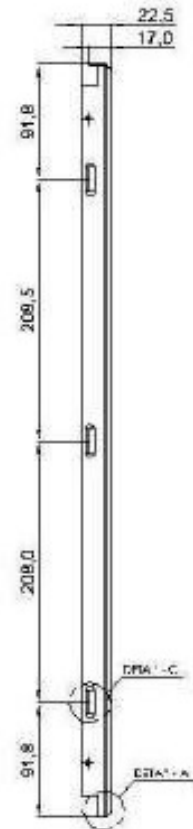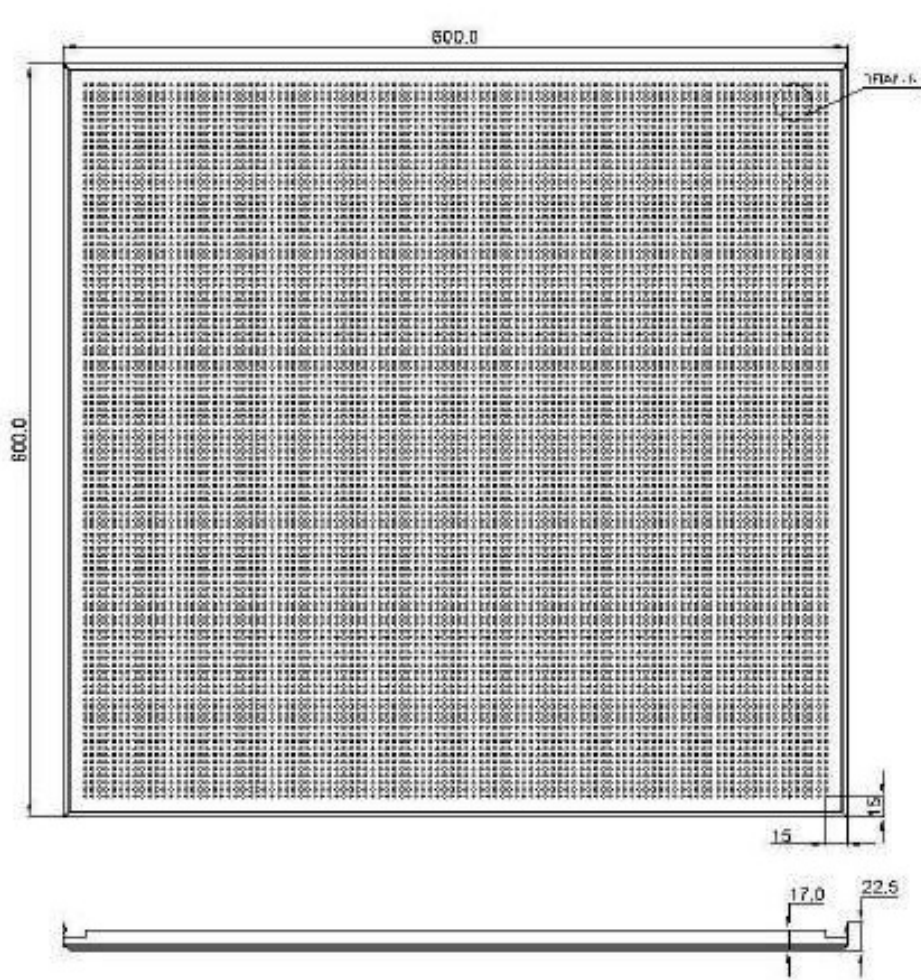

Çap	Yarıçap	J	Ø	L	H	R	GA
1	<10	0.18	0.3	3.0	0.5	0.7	1"
2	10-20	0.18	0.3	3.0	0.5	0.7	1"
3	20-30	0.2	0.3	3.0	0.5	0.7	1.2"
4	30-40	0.2	0.3	3.0	0.5	0.7	1.2"
5	40-50	0.2	0.3	3.0	0.5	0.7	1.2"
6	50-60	0.2	0.3	3.0	0.5	0.7	1.2"
7	60-70	0.2	0.3	3.0	0.5	0.7	1.2"
8	70-80	0.2	0.3	3.0	0.5	0.7	1.2"
9	80-90	0.2	0.3	3.0	0.5	0.7	1.2"
10	90-100	0.2	0.3	3.0	0.5	0.7	1.2"

Kullanım yeri:	ÇİP. TOLERANSI		YÜZEY PÜRÜZLÜĞÜ		Bu veçerînin emsalini vâkıde: Yarırdan olmaksızın kopya etmek, dâhîlî şâhısın içtimâk yada üzdülmüş deki amak yâskâr:
	Yılı	Tarih	İşin	Ölçü	
01	MALZEME: ÇİP ÇALIĞI 17
02	
03	TAKVİMİ: ÇİP ÇALIĞI 17
04	
05	ÇİP ÇALIĞI 17 2.000 5455 F-LL
06	
07	SİSİM NO: VT-090605 2000-9000
08	
09	
10	

CLIPIN SİSTEM

